

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available.
I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.


CERTIFIER'S NAME VERLE C. MOORE		LICENSE NUMBER (or Affix Seal) 501	
TITLE REGISTERED PROFESSIONAL LAND SURVEYOR	COMPANY NAME - MOORE SURVEYING		
ADDRESS 424 Second Avenue, S.E.	CITY Albany	STATE Oregon	ZIP 97321
SIGNATURE	DATE August 28, 1992	PHONE (503) 928-3878	

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

COMMENTS: The vertical datum is Benton County B.M. #31 at Springhill and Quarry Road. Vertical datum is NGVD 1929. Elevation 203.98.
The floor of the garage is 199.21.

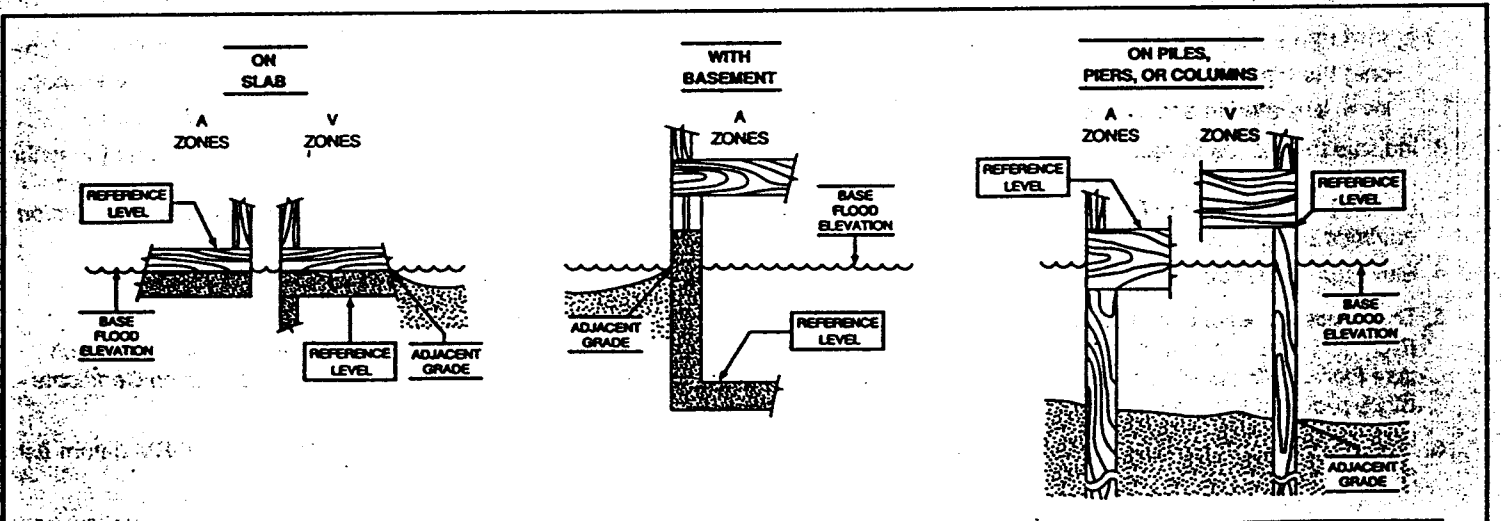

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.
Elevations for all A Zones should be measured at the top of the reference level floor.
Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

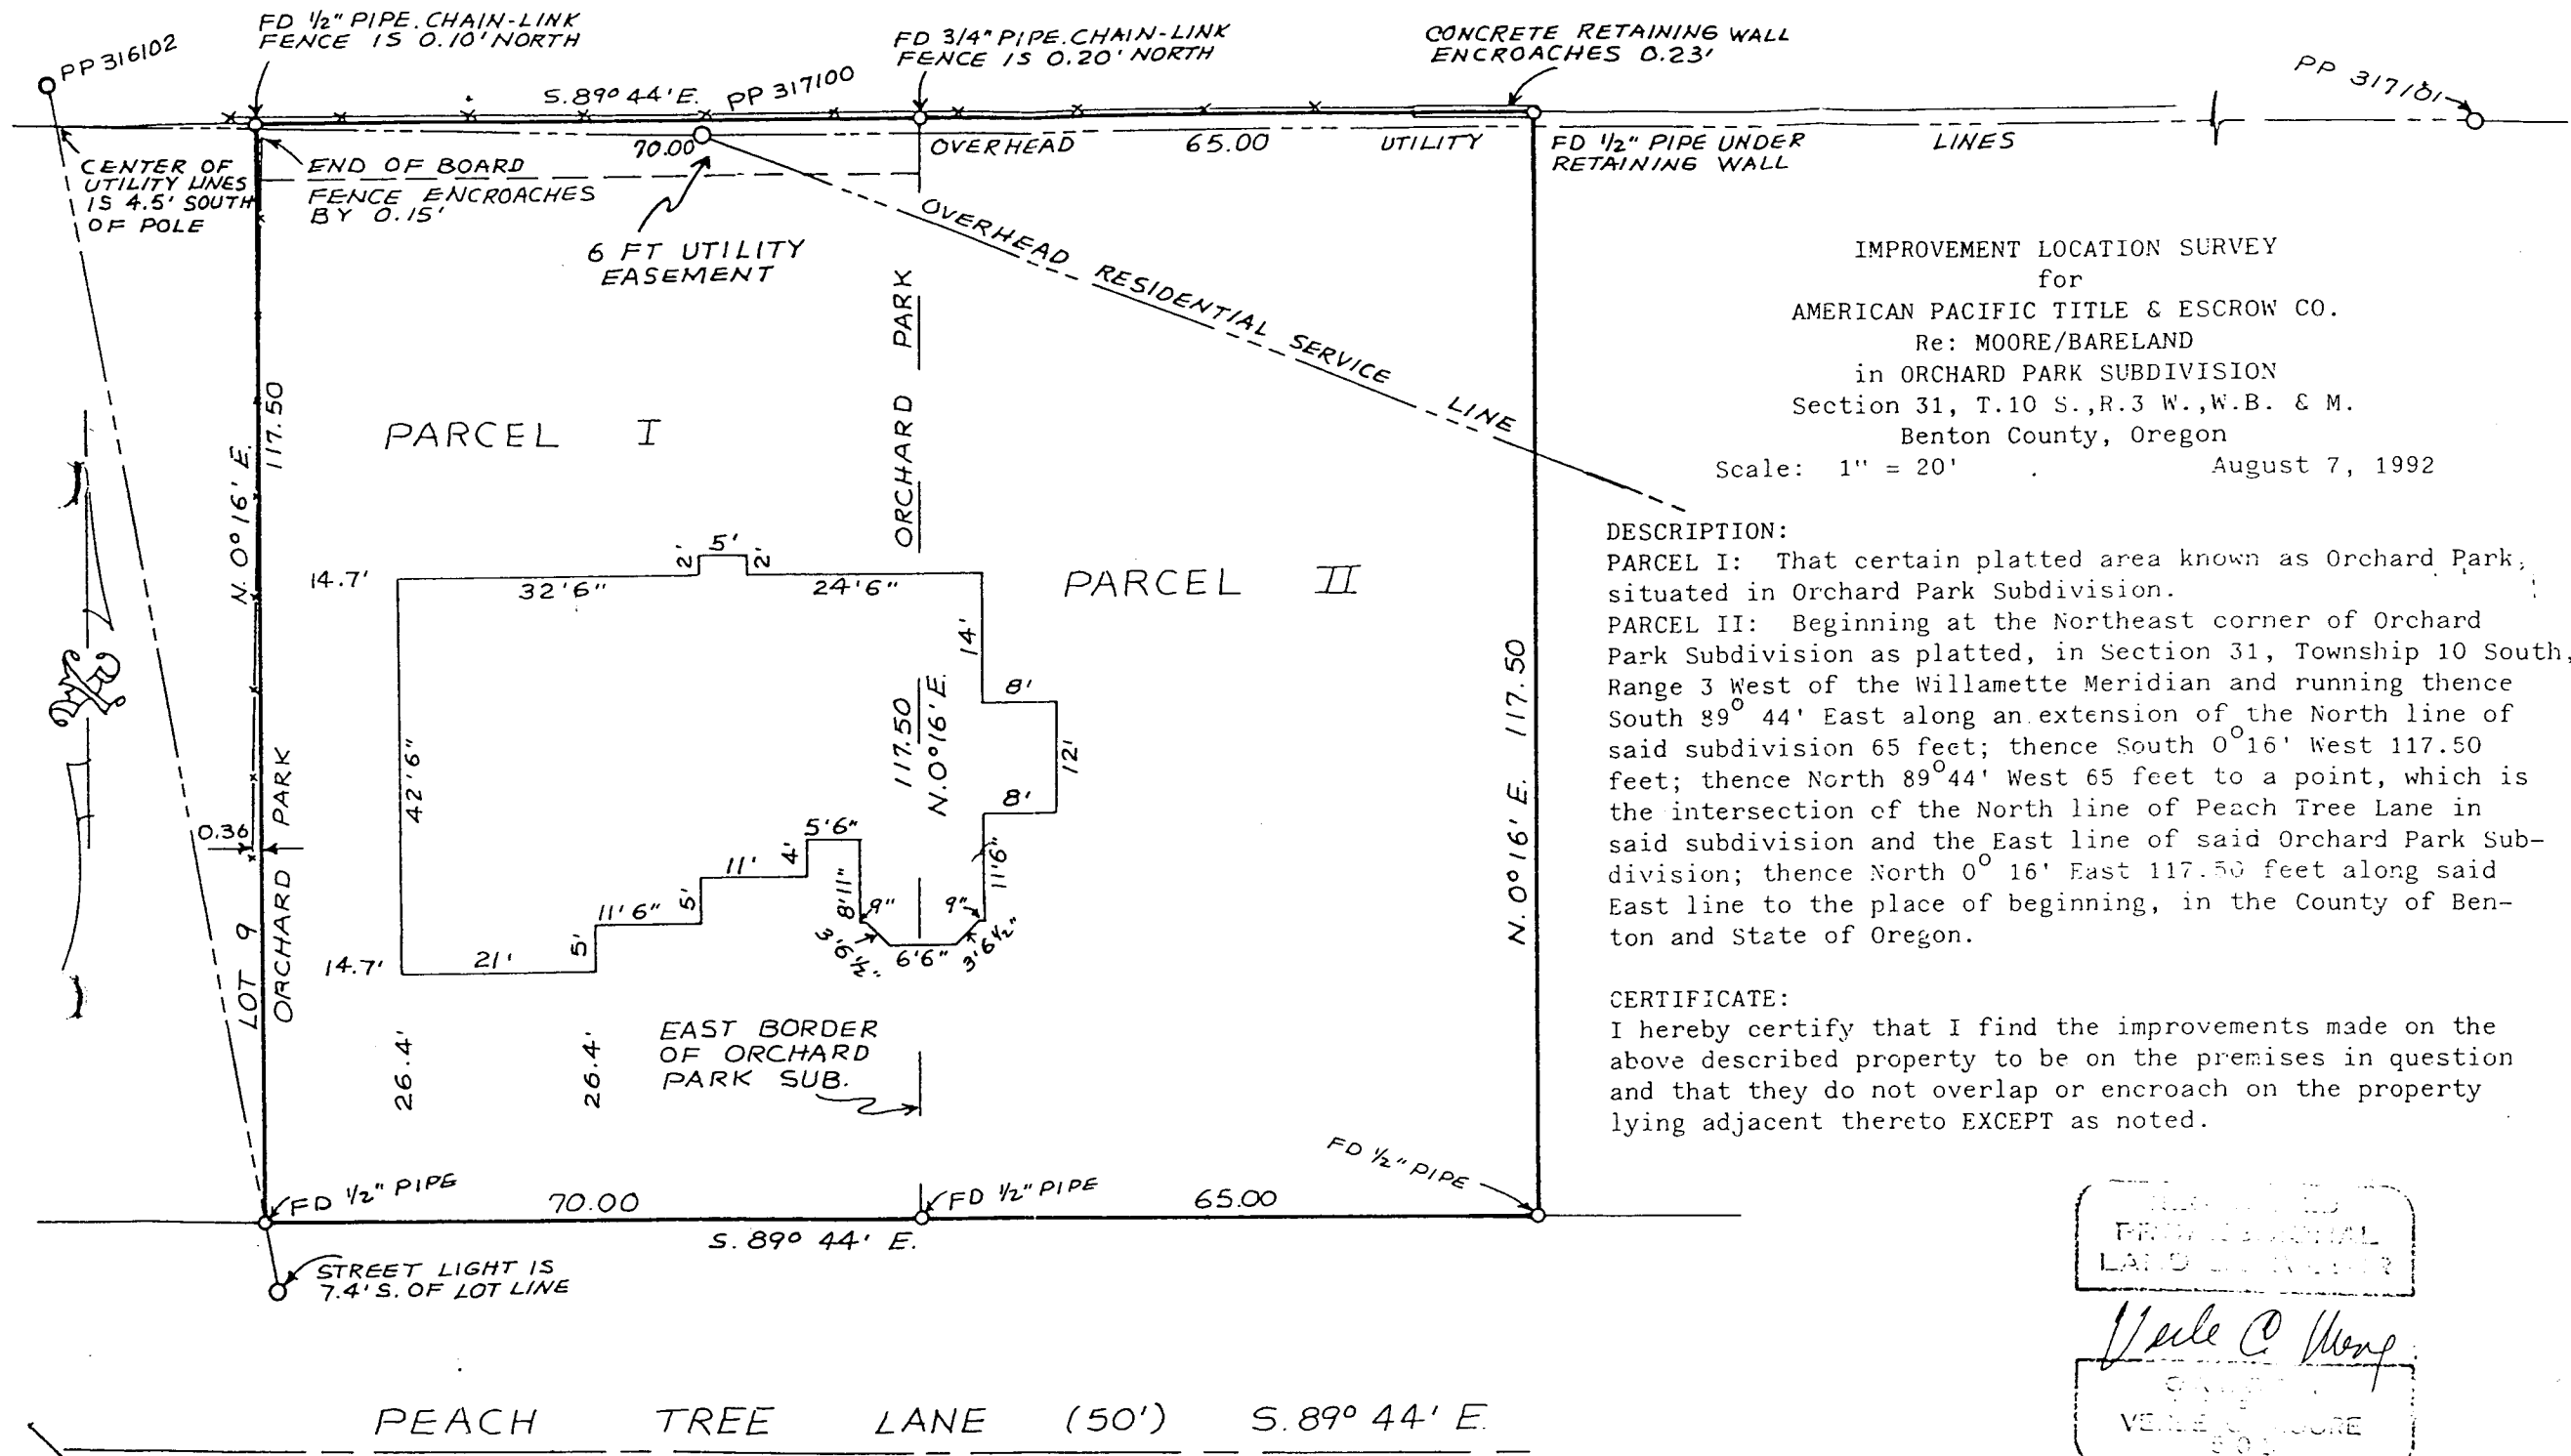

IMPROVEMENT LOCATION SURVEY
 for
 AMERICAN PACIFIC TITLE & ESCROW CO.
 Re: MOORE/BARELAND
 in ORCHARD PARK SUBDIVISION
 Section 31, T.10 S., R.3 W., W.B. & M.
 Benton County, Oregon
 Scale: 1" = 20' August 7, 1992

DESCRIPTION:
 PARCEL I: That certain platted area known as Orchard Park, situated in Orchard Park Subdivision.
 PARCEL II: Beginning at the Northeast corner of Orchard Park Subdivision as platted, in Section 31, Township 10 South, Range 3 West of the Willamette Meridian and running thence South 89° 44' East along an extension of the North line of said subdivision 65 feet; thence South 0° 16' West 117.50 feet; thence North 89° 44' West 65 feet to a point, which is the intersection of the North line of Peach Tree Lane in said subdivision and the East line of said Orchard Park Subdivision; thence North 0° 16' East 117.50 feet along said East line to the place of beginning, in the County of Benton and State of Oregon.

CERTIFICATE:
 I hereby certify that I find the improvements made on the above described property to be on the premises in question and that they do not overlap or encroach on the property lying adjacent thereto EXCEPT as noted.

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR
Wade C. Wong
 STATE OF OREGON
 VERIFICATION NUMBER
 800